


# MERITOR® ALLFIT MG1A STANDARD FRICTION MATERIAL



**MERITOR®**


## IDEAS DRIVING RESULTS

ENGINEERED TO MEET THE  
PERFORMANCE DEMANDS REQUIRED  
FOR AUSTRALIAN ROAD CONDITIONS.

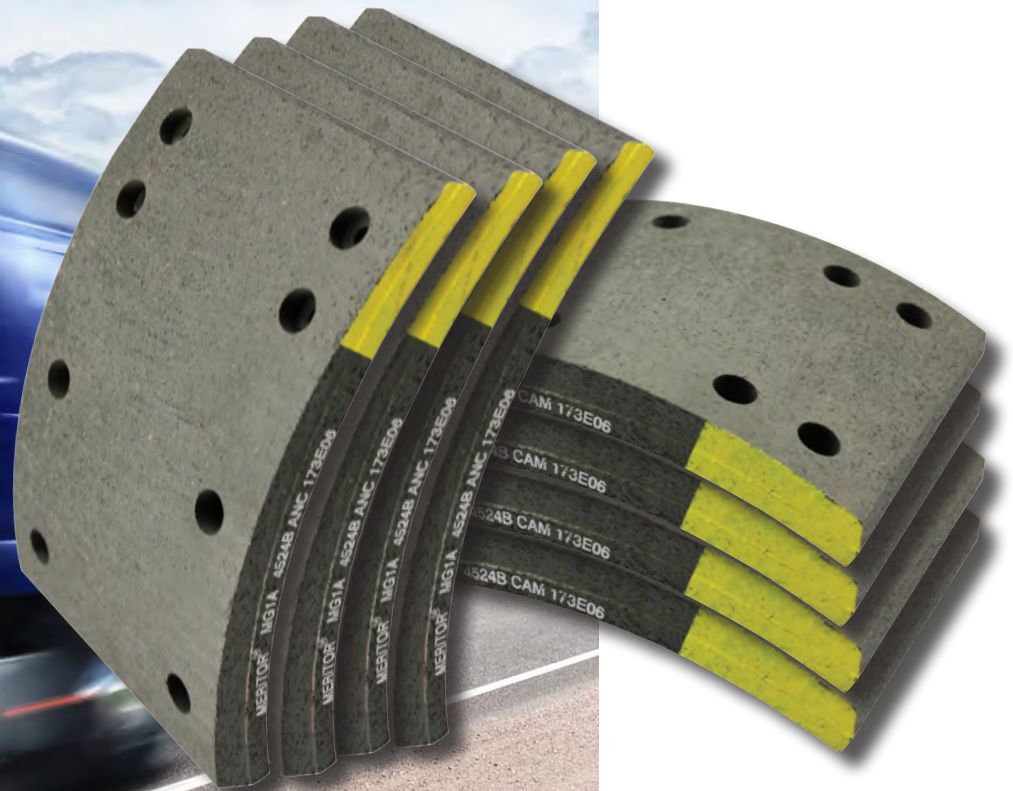


**ALLFIT**


## MG1A RETARDATION FORCE

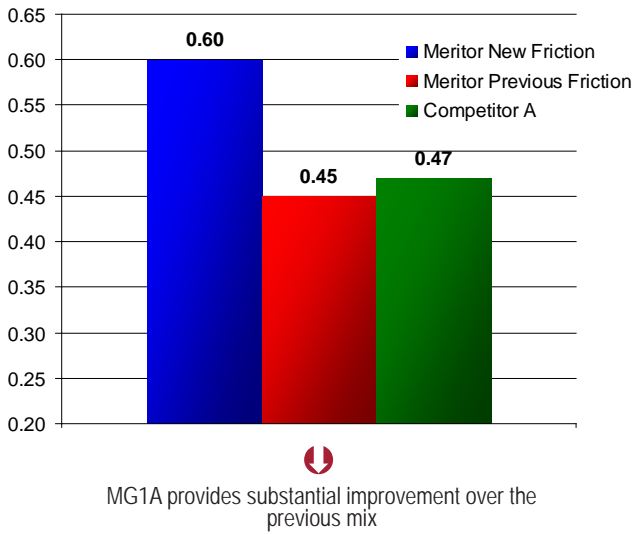

## MG1A BRAKE POWER (FADE)

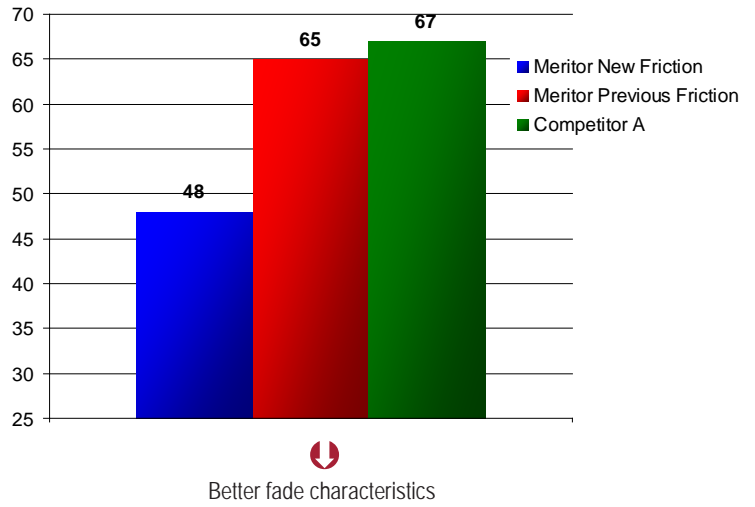

## MG1A RECOVERY

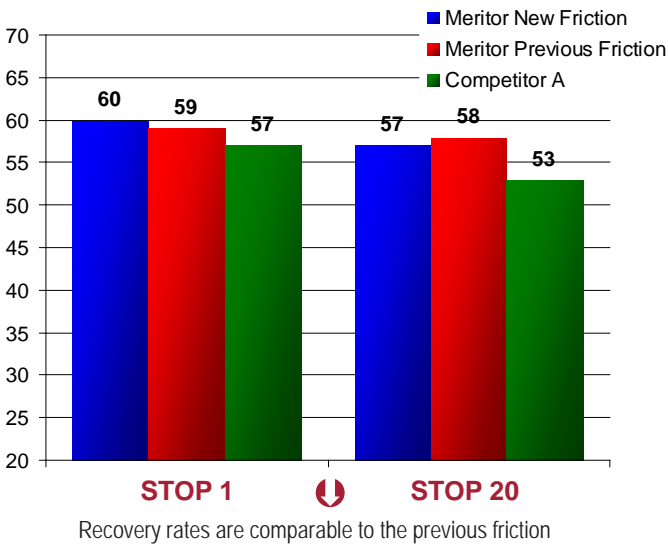

TECHNICAL DATA	
Brake:	16 1/2" x 7" Meritor S Cam
Normal Friction:	.429
Hot Friction:	.443

## FEATURES AND BENEFITS

- Exceptional stopping power
- Excellent fade and recovery characteristics providing outstanding reliability and durability
- Delivers excellent performance over a wide range of S-cam and wedge brake applications on trucks, tractors and trailers
- Recognised as a dependable, long lasting and versatile performer at a competitive price
- Delivers a level of durability and stability normally found only in higher cost friction
- MG1A lining is a glass fibre based medium friction, non asbestos material
- Meets the inertial dynamometer requirement of the FMVSS 121 brake standard



**Meritor Heavy Vehicle Systems**  
50 Calarco Drive  
DERRIMUT VIC 3030  
AUSTRALIA

Phone: (+61 3) 8353 6050  
Fax: (+61 3) 8353 6060  
Email: [cvaau.sales@meritor.com](mailto:cvaau.sales@meritor.com)

[meritorpartsonline.com](http://meritorpartsonline.com)  
[meritor.com](http://meritor.com)