


MERITOR® ALLFIT MG2A PREMIUM FRICTION MATERIAL



MERITOR®


IDEAS DRIVING RESULTS

ENGINEERED TO MEET THE
PERFORMANCE DEMANDS REQUIRED
FOR AUSTRALIAN ROAD CONDITIONS.

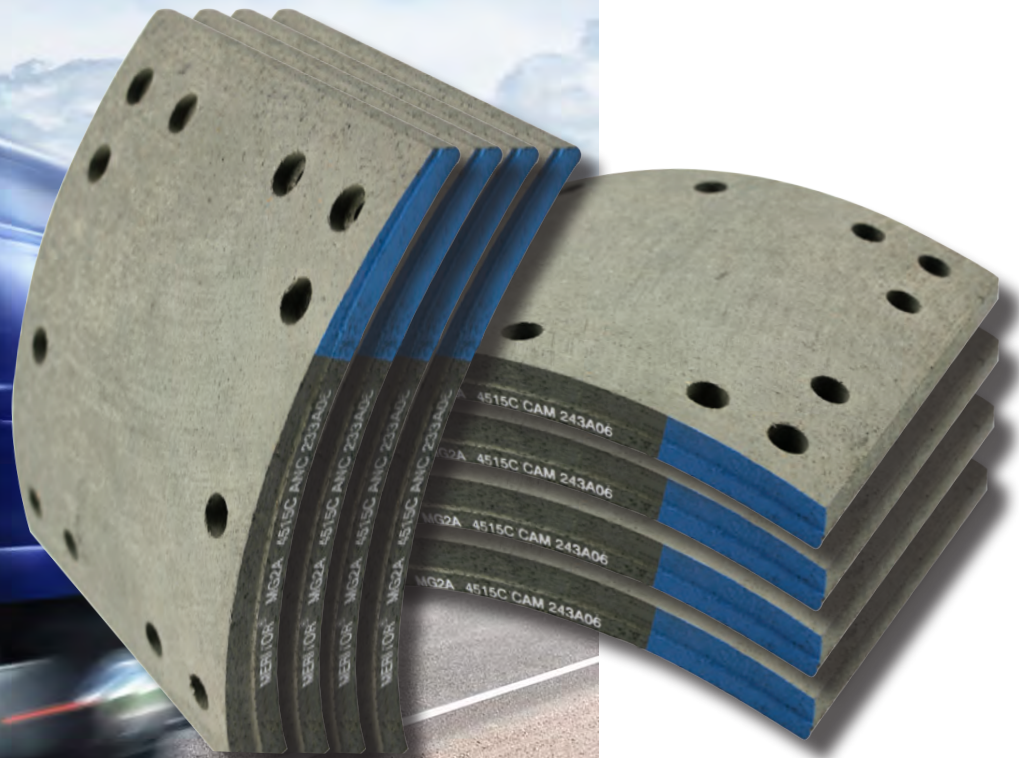



ALLFIT

MG2A RETARDATION FORCE

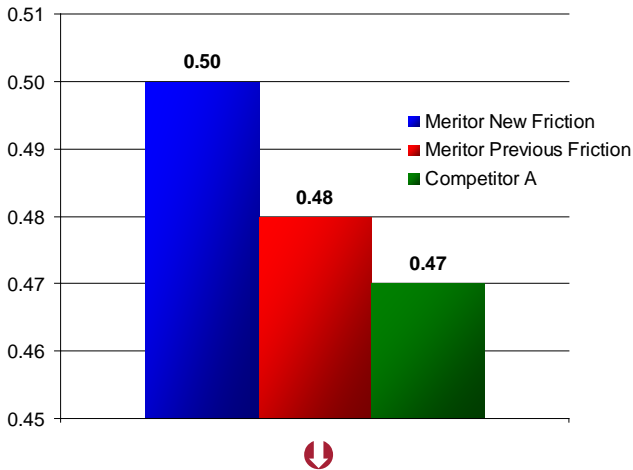


MG2A displays better retardation than the previous mix

MG2A BRAKE POWER (FADE)

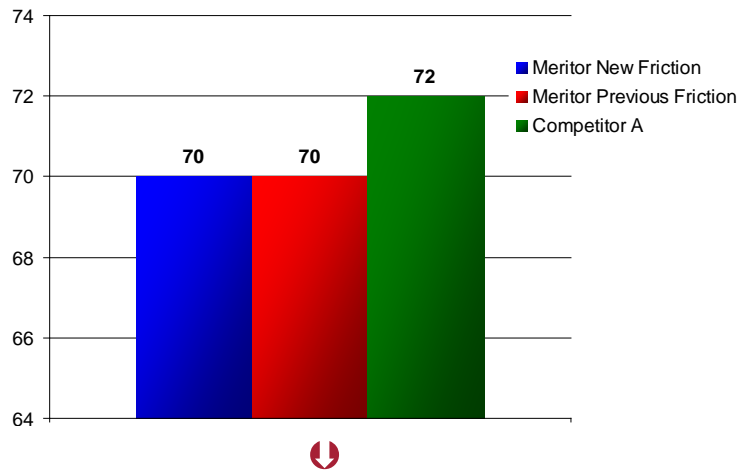

Fade characteristics are maintained

MG2A RECOVERY

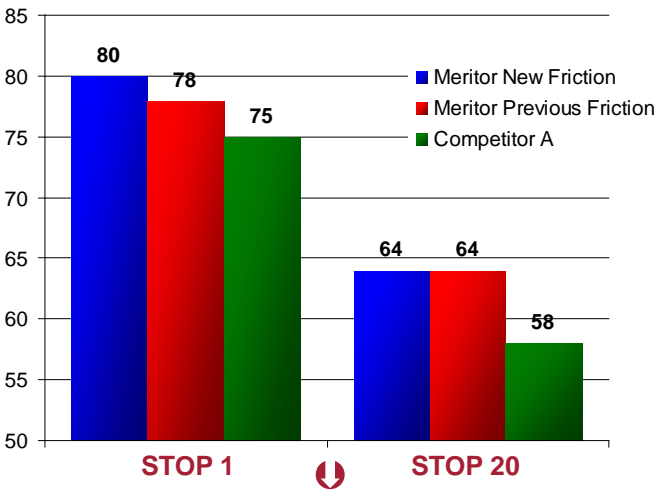

MG2A exhibits an improvement in recovery

TECHNICAL DATA

Brake:	16 1/2" x 7" Meritor S Cam
Normal Friction:	.503
Hot Friction:	.495

FEATURES AND BENEFITS

- Durability for stop-an-go urban driving
- Provides strong brake power for all vehicle applications in severe service
- Superior all-around performance
- Ideal for trucks, tractors, trailers, buses, tippers and low loaders
- MG2A lining is a glass fibre based premium medium-to-high non asbestos friction material
- Meets the inertial dynamometer requirement of the FMVSS 121 brake standard



Meritor Heavy Vehicle Systems
50 Calarco Drive
DERRIMUT VIC 3030
AUSTRALIA

Phone: (+61 3) 8353 6050
Fax: (+61 3) 8353 6060
Email: cvaau.sales@meritor.com

meritorpartsonline.com
meritor.com